

## PRODUCT DATA SHEET

---

Part number 216402

---

EAN 4015609012824

Manufacturer WALTHER-WERKE

WEEE-Reg.-Number: DE 22131895

---

### Product description

---

MONDO angled plug 16A 4P 2h with back part in light grey



Similar image

### Detailed product description

---

WALTHER angled Plug 16A 4P 50-500V 300-500Hz 2h IP44  
 from MONDO series  
 made from PA6 material  
 with screw terminal  
 back part in light grey (RAL 7035)

### Ordering Information

---





|                         |          |
|-------------------------|----------|
| Order unit              | Piece    |
| Customs number          | 85366990 |
| Net weight              | 0,15 kg  |
| Packing quantity (VPE)  | 10       |
| Length of the packaging | 0,31 m   |
| Width of the packaging  | 0,163 m  |
| Depth of the packaging  | 0,113 m  |
| Gross weight(VPE)       | 1,612 kg |

### Certificates

---

VDE/ENEC certification 40024787



|                   |                       |                                                                                     |
|-------------------|-----------------------|-------------------------------------------------------------------------------------|
| UL certification  | No. E329476           |  |
| UL certification  | No. E188992           |  |
| EAC certification | BY112.02.01.020 06090 |  |
| CSA certification | 70096522              |  |

## Classification system

---

|                       |          |
|-----------------------|----------|
| Classification system | ETIM_6.0 |
| ETIM Class            | EC000140 |


## Technical product data

---

|                                       |                              |
|---------------------------------------|------------------------------|
| IEC-amperage                          | 16 A                         |
| Amperage acc. UL/CSA (for UL-version) | 20 A                         |
| Number of poles                       | 4                            |
| Voltage acc. EN 60309-2               | 50-500 V (>300-500 Hz) green |
| Clock hour position                   | 2 h                          |
| Identification colour                 | Green                        |
| RAL-number                            | 6025                         |
| Degree of protection (IP)             | IP44                         |
| Connection system                     | Screwed terminal             |
| Cable entry                           | Anti-kink sleeve             |
| Angle of plug                         | Angled                       |
| Material                              | Plastic                      |

## Dimension sheet

---

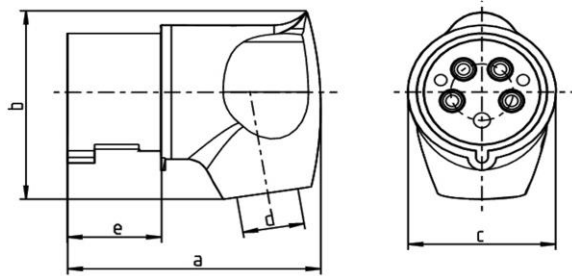

| Amp. | 16   |         |         | 32    |       |       |
|------|------|---------|---------|-------|-------|-------|
| Pole | 3    | 4       | 5       | 3     | 4     | 5     |
| a    | 85   | 98      | 98      | 115   | 115   | 115   |
| b    | 70   | 86      | 86      | 96    | 96    | 100   |
| c    | 50,3 | 64,3    | 64,3    | 72    | 72    | 72    |
| d    | 8/15 | 10/16,5 | 10/16,5 | 11/22 | 11/22 | 11/22 |
| e    | 37   | 37      | 37      | 45,8  | 45,8  | 45,8  |