

## PRODUCT DATA SHEET

---

Part number 239402

---

EAN 4015609014316

Manufacturer WALTHER-WERKE

WEEE-Reg.-Nr: DE 22131895

### Product description

---

Waterproof Plug 32A 4P 2h with external cable gland



Product Image

### Detailed product description

---

WALTHER Plug 32A 4P 50-500V 300-500Hz 2h IP67

made from PA6 material

with screw terminal

and cable gland

Increased safety due to injected 2K seal and two contact screws.

### Ordering information

---





order unit	Piece
customs number	85366990
net weight	0.3026 kg
packing quantity (VPE)	10
length of the packaging	0.31 m
width of the packaging	0.255 m
depth of the packaging	0.15 m
gross weight(VPE)	3.222 kg

### Conformities

---

CE conformity	√
RoHS directive	2011/65/EU
RoHS directive	2015/863/EU
REACH regulation	1907/2006

## Certification

VDE/ENEC certification	40021520	
UL certification	No. E329476	
EAC certification	BY112.02.01.020 06090	
CSA certification	70096522	


## Classification system

classification system	ETIM_7.0
ETIM Class	EC000140

## Technical product data

IEC-amperage	32 A
Amperage according to UL/CSA (for UL-version)	30 A
Number of poles	4
Voltage according to EN 60309-2	50-500 V (>300-500 Hz) green
Clock hour position	2 h
Identification colour	Green
Conductor cross-section	2.5 - 6 mm <sup>2</sup>
Cable diameter	10 - 22.5 mm
Cable strip length	45 mm +/- 2.5 mm
Cable ferrules length	10 mm +/- 1 mm
Maximum torque terminal screw	0.8 Nm
Maximum torque cable gland	4 Nm
Degree of protection (IP)	IP67
Connection system	Screwed terminal
Contact material	Nickel-plated brass
Cable entry	Swivel
Angle of plug	Straight
Material	Plastic
Inflammability class of insulation material according to with UL94	V2

## Dimension sheet

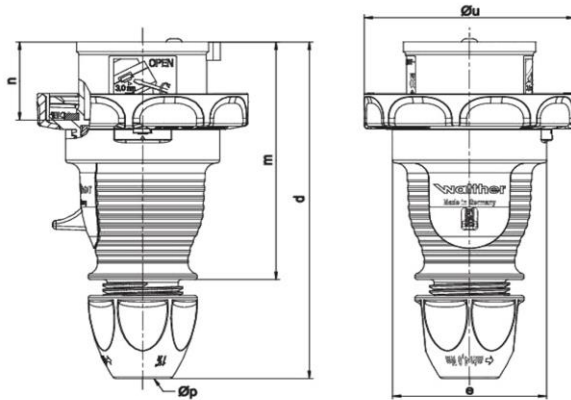

<b>Amp.</b>	16	16	32	32
<b>Pole</b>	4	5	3 / 4	5
<b>d</b>	150-161	150-161	174-183	174-183
<b>Ø e</b>	Ø 65	Ø 65	Ø 72	Ø 72
<b>m</b>	111	111	127	127
<b>n</b>	36,5	36,5	45,5	45,5
<b>Ø u</b>	Ø 81	Ø 89	Ø 95	Ø 100
<b>Ø p</b>	7,5-18,5	7,5-18,5	10-22,5	10-22,5