

## PRODUCT DATA SHEET

---

|                   |               |
|-------------------|---------------|
| Part number       | 410509        |
| EAN               | 4015609018642 |
| Manufacturer      | WALTER-WERKE  |
| WEEE-Reg.-Number: | DE 22131895   |

### Product description

---

Panel socket straight 16A 5P 9h with flange  
75x75mm



Similar image

### Detailed product description

---

WALTER Panel socket 16A 5P 230V 9h IP44  
 straight  
 made from PA6 material  
 finger-safe in accordance with BGV A3  
 soft transition  
 radius from flange to collar  
 flange 75x75  
 fixing center 60x60




### Ordering Information

---

|                         |          |
|-------------------------|----------|
| Order unit              | Piece    |
| Customs number          | 85366990 |
| Net weight              | 0,165 kg |
| Packing quantity (VPE)  | 10       |
| Length of the packaging | 0,31 m   |
| Width of the packaging  | 0,195 m  |
| Depth of the packaging  | 0,14 m   |
| Gross weight(VPE)       | 1,798 kg |

### Certificates

---

|                   |                       |   |
|-------------------|-----------------------|---|
| VDE certification | 123017                |  |
| UL certification  | No. E83342            |  |
| EAC certification | BY112.02.01.020 06089 |  |

## Classification system

---

|                       |          |
|-----------------------|----------|
| Classification system | ETIM_6.0 |
| ETIM Class            | EC001317 |


## Technical product data

---

|                                       |                       |
|---------------------------------------|-----------------------|
| IEC-amperage                          | 16 A                  |
| Amperage acc. UL/CSA (for UL-version) | 20 A                  |
| Number of poles                       | 5                     |
| Voltage acc. EN 60309-2               | 230 V (50+60 Hz) blue |
| Clock hour position                   | 9 h                   |
| Identification colour                 | Blue                  |
| RAL-number                            | 5002                  |
| Degree of protection (IP)             | IP44                  |
| Connection system                     | Screwed terminal      |
| Angle of plug                         | Straight              |
| Material                              | Plastic               |
| Flange size vertical                  | 75 mm                 |
| Drill hole distance vertical          | 60 mm                 |
| Flange size horizontal                | 75 mm                 |
| Drill hole distance horizontal        | 60 mm                 |

## Dimension sheet

---

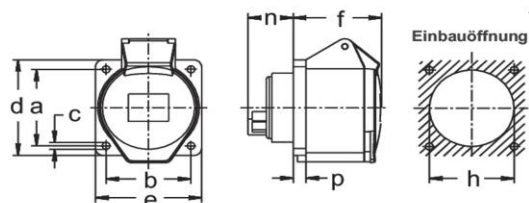

| Amp. | 16  |     |     | 32  |     |     |
|------|-----|-----|-----|-----|-----|-----|
| Pole | 3   | 4   | 5   | 3   | 4   | 5   |
| a    | 60  | 60  | 60  | 60  | 60  | 60  |
| b    | 60  | 60  | 60  | 60  | 60  | 60  |
| c    | 5,5 | 5,5 | 5,5 | 5,5 | 5,5 | 5,5 |
| d    | 75  | 75  | 75  | 75  | 75  | 75  |
| e    | 75  | 75  | 75  | 75  | 75  | 75  |
| f    | 52  | 53  | 53  | 65  | 65  | 65  |
| h    | 46  | 60  | 60  | 60  | 60  | 60  |
| n    | 28  | 28  | 28  | 27  | 27  | 27  |
| p    | 6   | 9   | 9   | 9   | 9   | 9   |

| Passender Blindflansch, Art.-Nr. 10 015: |     |
|--|-----|
| a  | 60  |
| b  | 60  |
| c  | 5,2 |
| d  | 75  |
| e  | 75  |
| p  | 6   |