

## PRODUCT DATA SHEET

---

Part number 568504

EAN 4015609022540

Manufacturer WALTHER-WERKE

WEEE-Reg.-Number: DE 22131895

### Product description

---

Waterproof panel socket angled 63A 5P 4h with  
screwed flange housing 114x114mm



Similar image

### Detailed product description

---

WALTHER Panel socket 63A 5P 110V 4h IP67

made from PA6 material

angled

with screwed flange housing

flange center 114x114mm

fixing center 90x90mm




### Ordering Information

---

|                         |          |
|-------------------------|----------|
| Order unit              | Piece    |
| Customs number          | 85366990 |
| Net weight              | 0,779 kg |
| Packing quantity (VPE)  | 5        |
| Length of the packaging |          |
| Width of the packaging  |          |
| Depth of the packaging  |          |
| Gross weight(VPE)       | 3,895 kg |

### Certificates

---

|                   |                       |   |
|-------------------|-----------------------|---|
| VDE certification | 40000707              |  |
| UL certification  | No. E83342            |  |
| EAC certification | BY112.02.01.020 06089 |  |

## Classification system

---

|                       |          |
|-----------------------|----------|
| Classification system | ETIM_6.0 |
| ETIM Class            | EC001317 |


## Technical product data

---

|                                       |                         |
|---------------------------------------|-------------------------|
| IEC-amperage                          | 63 A                    |
| Amperage acc. UL/CSA (for UL-version) | 60 A                    |
| Number of poles                       | 5                       |
| Voltage acc. EN 60309-2               | 110 V (50+60 Hz) yellow |
| Clock hour position                   | 4 h                     |
| Identification colour                 | Yellow                  |
| RAL-number                            | 1018                    |
| Degree of protection (IP)             | IP67                    |
| Connection system                     | Screwed terminal        |
| Angle of plug                         | Angled                  |
| Material                              | Plastic                 |
| Military model                        | False                   |
| Flange size vertical                  | 114 mm                  |
| Drill hole distance vertical          | 90 mm                   |
| Flange size horizontal                | 114 mm                  |
| Drill hole distance horizontal        | 90 mm                   |

## Dimension sheet

---

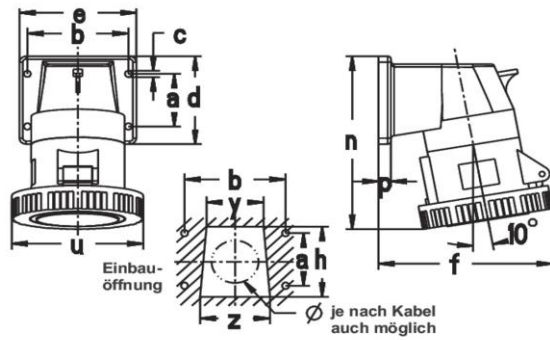

| Amp. | 16  |     |     | 32  |     |     | 63  |     |     |
|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Pole | 3   | 4   | 5   | 3   | 4   | 5   | 3   | 4   | 5   |
| a    | 30  | 40  | 40  | 45  | 45  | 45  | 90  | 90  | 90  |
| b    | 55  | 68  | 68  | 78  | 78  | 78  | 90  | 90  | 90  |
| c    | 5,5 | 5,5 | 5,5 | 5,5 | 5,5 | 5,5 | 6,2 | 6,2 | 6,2 |
| d    | 52  | 66  | 66  | 75  | 75  | 75  | 114 | 114 | 114 |
| e    | 65  | 80  | 80  | 90  | 90  | 90  | 114 | 114 | 114 |
| f    | 88  | 108 | 108 | 121 | 121 | 123 | 143 | 143 | 143 |
| h    | 38  | 52  | 52  | 60  | 60  | 60  | 70  | 70  | 70  |
| n    | 109 | 123 | 123 | 145 | 145 | 145 | 203 | 203 | 203 |
| p    | 9,5 | 9,5 | 9,5 | 9,5 | 9,5 | 9,5 | 6   | 6   | 6   |
| u    | 72  | 81  | 88  | 96  | 96  | 103 | 110 | 110 | 110 |
| y    | 30  | 38  | 38  | 44  | 44  | 44  | 56  | 56  | 56  |
| z    | 36  | 46  | 46  | 54  | 54  | 54  | 65  | 65  | 65  |